



BatLED



6810-068-CR5

BatLED II60LED 8340lm 80W CR5

The BatLED is one of U-Tron's most versatile lighting solutions. It can be powered by both conventional and solar power supplies. U-Tron innovated the design of the typical halogen flood light and turned it into an eco-friendly system. The BatLED can be used as interior/exterior flood lights, and general purpose exterior lighting.

Product Technical Data

General Informaion

Heatsink 6063-T5 aluminum alloy
 Life Span 50000hr

Light Characteristics

Efficacy 135 lm/W
 Beam Angle 120
 CCT 5500K
 Flux 9450lm
 85

Color Rending Index

Electrical Characteristics

Wattage 70W
 Voltage universal
 Power Factor 0.937

Temperature

Operating Temp. -40(min), 45(max)C
 Storage -40(min), 45(max)C

Product Dimensions

Lamp Length 402mm
 Lamp Width 333mm
 Lamp Height 200.5mm
 Lamp Body Length 284mm

Ordering Information


Product Number A-6810-068-CR5
 Product Name BatLED II68
 Product Ordering Name BatLED II68 9450lm 70W CR5
 Pieces Per Pack 1
 Packs Per Carton 1
 Net Weight Per Piece 7.3 Kg

www.u-tron.com



BatLED

Technical Drawing

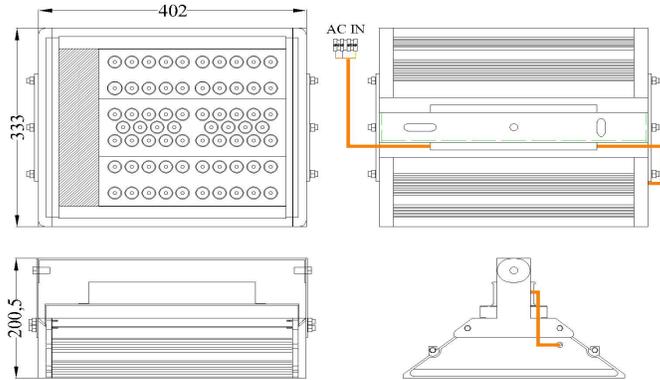


Light Distribution Characteristics

Ceiling Height: 6-10 Meters



Polar Candela Distribution

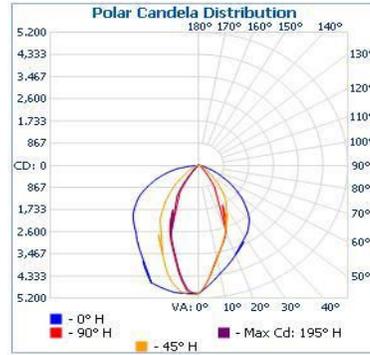

©2012 U-Tron (Beijing) Electronics Co., LTD

All rights reserved

Specifications are subject to change without notice

15-Feb-12

data subject to change

www.u-tron.com

