



Features:


- NO complicated powerline wirings.
- Produces better lighting than the conventional lamps.
- Zero maintenance last to 5000 hrs Independent from electric bills.

Application


Street Lighting ,Farm Lighting ,Campus Lighting, Yard Lighting.

Technical Specifications

■ Outline Drawing

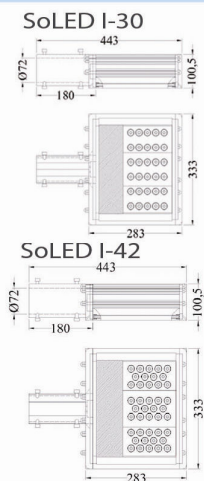

■ Polar Candela Distribution

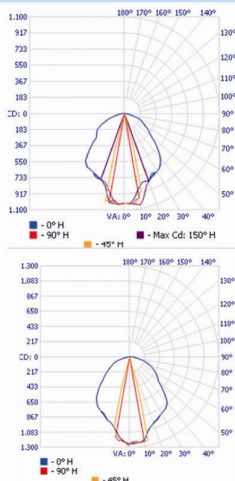

■ Illuminance

Illuminance at a Distance		Beam Width	
Center Beam LUX			
0.7m	2,624.65 LUX	1.3m	1.0m
1.3m	656.16 LUX	2.7m	1.9m
2.0m	291.63 LUX	4.0m	2.9m
2.7m	164.04 LUX	5.3m	3.9m
3.3m	104.99 LUX	6.6m	4.9m
4.0m	72.91 LUX	8.0m	5.8m

■ Vert. Spread: 89.8° ■ Horiz. Spread: 72.2°

Ordering Guide

Photo	Model No.	Power	Product Name	CCT	Lumens	Description
	A-6830-030-CQ5	35W	SoLED I 30	5500K	3210	Number of LED: 30 Cree LED Input Voltage: 10-30VDC IP65 Net Weight: 6.5kg Dimensions: 443*333*100.5mm
	A-6830-030-CR4		SoLED I 30	5500K	3900	
	A-6830-030-WQ2		SoLED I 30	2700K	2622	
	A-6830-030-WP4		SoLED I 30	2700K	2400	
	A-6830-042-CQ5	50W	SoLED I 42	5500K	4494	Number of LED: 42 Cree LED Input Voltage: 10-30VDC IP65 Net Weight: 6.5kg Dimensions: 443*333*100.5mm
	A-6830-042-CR4		SoLED I 42	5500K	5460	
	A-6830-042-WQ2		SoLED I 42	2700K	3670	
	A-6830-042-WP4		SoLED I 42	2700K	3385	

■ Packaging Information

■ Dealer Information



U-Tron (Beijing) Electronics Co., Ltd.

East 5Th floor, 10 Lang jia yuan Jian Guo Men Wai Avenue Beijing,China,100022

86-010-6568-2990 ; www.u-tron.com