



Features:


- NO complicated powerline wirings.
- Produces better lighting than the conventional lamps.
- Zero maintenance last to 5000 hrs Independent from electric bills.

Application


Street Lighting ,Farm Lighting ,Campus Lighting, Yard Lighting.

Technical Specifications

■ Outline Drawing

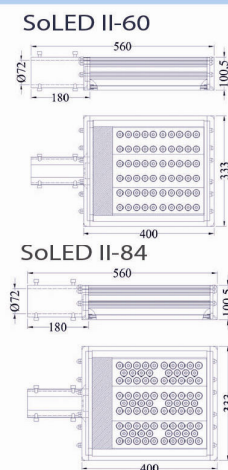

■ Polar Candela Distribution

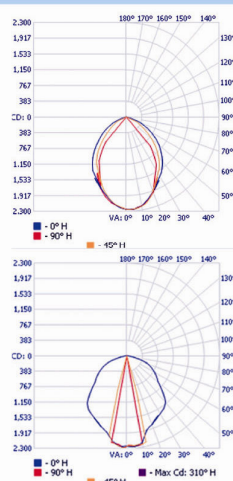

■ Illuminance

Illuminance at a Distance			
Center Beam LUX		Beam Width	
1.7m	810.64 LUX	3.5m	2.4m
3.3m	202.66 LUX	6.9m	4.8m
5.0m	90.07 LUX	10.4m	7.2m
6.7m	50.67 LUX	13.8m	9.5m
8.3m	32.43 LUX	17.3m	11.9m
10.0m	22.52 LUX	20.7m	14.3m

■ Vert. Spread: 92.0° ■ Horiz. Spread: 71.2°

Ordering Guide

Photo	Model No.	Power	Product Name	CCT	Lumens	Description
	A-6830-060-CQ5	70W	SoLED II 60	5500K	6420	Number of LED: 60 Cree LED Input Voltage: 10-30VDC Net Weight: 8.7kg Dimensions: 560*333*100.5mm
	A-6830-060-CR4		SoLED II 60	5500K	7800	
	A-6830-060-WQ2		SoLED II 60	2700K	5244	
	A-6830-060-WP4		SoLED II 60	2700K	4836	
	A-6830-084-CQ5	100W	SoLED II 84	5500K	8988	Number of LED: 84 Cree LED Input Voltage: 10-30VDC Net Weight: 8.7kg Dimensions: 560*333*100.5mm
	A-6830-084-CR4		SoLED II 84	5500K	10920	
	A-6830-084-WQ2		SoLED II 84	2700K	7341	
	A-6830-084-WP4		SoLED II 84	2700K	6753	

■ Packing Information

■ Dealer Information