

Extendum T8



### 68T8-160-N1221

Storage

#### Extendum T8 1700lm 1200mm 21W G13 N

The Extendum T8 is the ideal LED replacement for conventional fluorescent tube lights. U-Tron's signature design allows for a brightness that is equal to traditional bulbs, with consistent coverage. The Extendum is the perfect solution for general lighting applications


# Product Technical Data

General Informaion	L	Product Dimensions	
Cap Size	G13	Length L1	1215mm
Life Span	50000hr	Length L2	1203mm
			10.7
		Bipin Distance B1	12.7mm
Light Characteristic	28	Mounting Hole Diameter D2	31mm
Efficacy	80.90lm/W	Circular Outline Dimension D1	26mm
Beam Angle	165 D		
CCT	4000K	Ordering Information	
Flux	1700lm	Product Number	68T8-160-N1221
	75	Product Name	Extendum T8
Color Rending Index		Product Ordering Name	Extendum T8 1700lm 1200mm 21W G13
Electrical Characteristics		Pieces Per Pack	1
Wattage	21W	Packs Per Carton	10
Voltage	universal	Net Weight Per Piece	360 Grams
Power Factor	0.937		
Temperature			www.u-tron.com
remperature			
Operating Temp.	-30(min), 65(max)C		U-Tron
Ctomo co	AO(min) (5(mon))C		


-30(min), 65(max)C -40(min), 65(max)C

# Extendum T8 Tubelight

# **Technical Drawing**



## Installation Guide

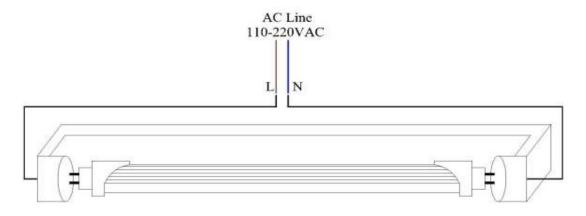

- a. No need a ballast
- b. No need a starter
- c. Connect directly to AC wire

### For Retrofit

- a. Cut-out the ballast and take out the starter
- b. Wires from the end terminal, connect it directly to AC wire
- c. After the wirings is done then fix the Extendum Tubelight on the troffer

©2012 U-Tron (Beijing) Electronics Co., LTD All rights reserved Specifications are subject to change without notice

15-Feb-12 data subject to change

