



Moon Light Recessed Internal PSU



U-Tron's Recessed Moon light series are designed with internal PSU and internal wiring connectors so they will meet the UL and CSA safety requirements for the USA and Canada. Now available in 5, 10 and 15 watt for the popular cut-outs and other versions will become available in the near future. Like all other U-Tron products we supply the lights with properly grounded and "Snap-On" connectors for easy installations.



68ML-I04-WQ5

5 Watts



68ML-I08-WQ5

10 Watts



68ML-I12-WQ5

15 Watts

General Informaion


LED Chips	Cree LED
Material	Aluminum Alloy
Installation	Recessed on the Ceiling
Life Span	50000hr
Operating Temp.	-40(min), 45(max)C
Storage	-40(min), 65(max)C

www.u-tron.com



Moon Light Recessed Internal PSU

Technical Drawing

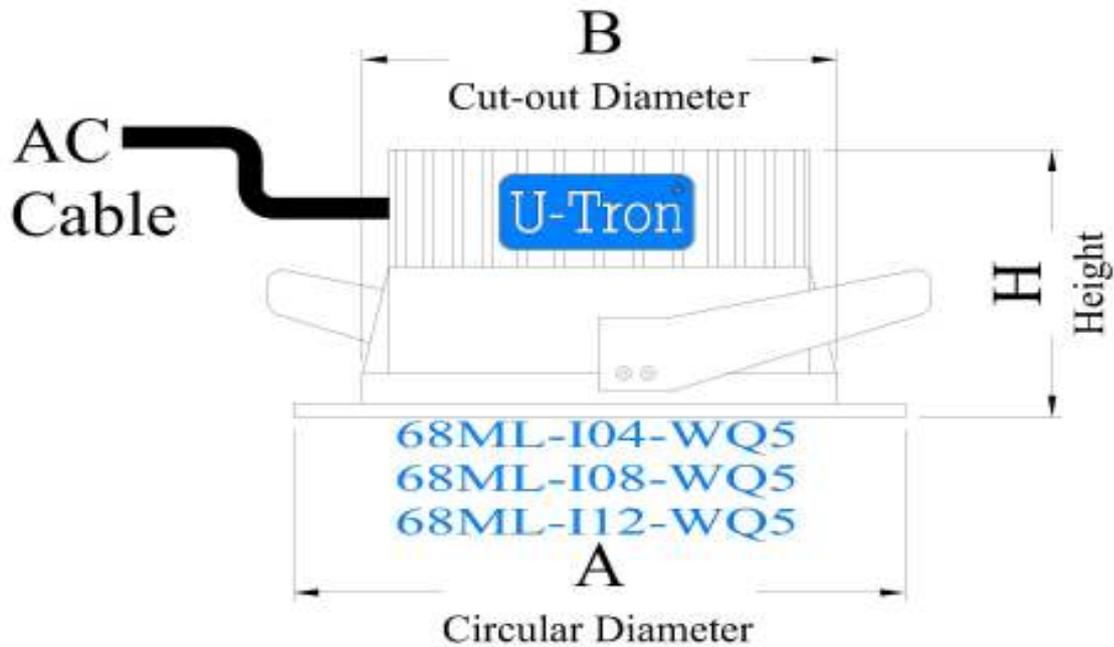

Part Number	68ML-I04-WQ5	68ML-I08-WQ5	68ML-I12-WQ5
Light Characteristics			
Total Lumens	500lm	1000lm	1500lm
Efficacy	100 lm/W	100 lm/W	100 lm/W
CCT	2700-3000K, 4000-4500K, 5000-6000K		
CRI	>80		
Beam Angle	120 degree		
Electrical Characteristics			
Wattage	5Watts	10Watts	15Watts
Input Voltage	Universal	Universal	Universal
Power Factor	0.95	0.95	0.95
Product Information			
Circular Diameter (A)	125mm	155mm	185mm
Cut-out Diameter (B) {US Inches}	100mm {4}	130mm {5}	155mm {6}
Height (H)	60mm	75mm	75mm

©2012 U-Tron (Beijing) Electronics Co., LTD
 All rights reserved
 Specifications are subject to change without notice
 7-Jan-13



